

Sirocco 2-S 6x 10W LED



Self-contained

All-in-one
package

Portable &
multipurpose



▶ Industrial Maintenance (Backpack Free Hands)



▶ Rescue Operations



▶ Night Work Fast Lighting



▶▶▶ Sirocco 2-S 6x 10W LED


SELF-INFLATING LIGHTING BALLOON

SIROCCO 2-S 6X 10W LED

0 90 480 m²
0 5 12 m

220 lux < EN12464-2 norm > 5 lux < EN1838 norm > 0.5 lux

Lamp: 6x 10W LED
Lighted area
Height of produit: 2.5 m

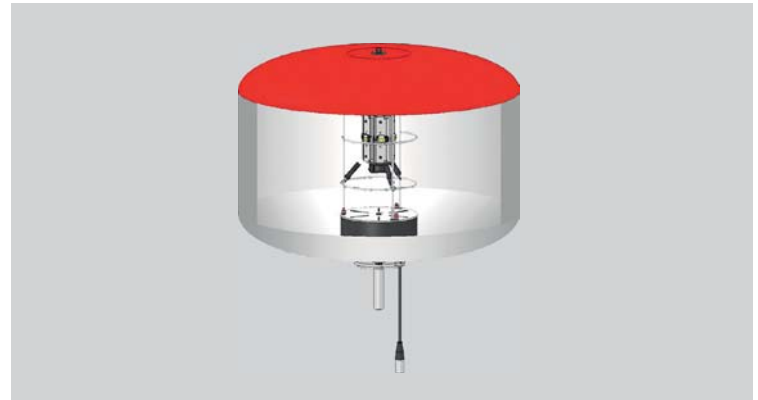

▶ SECURITY KIT: DIMENSIONS & PACKAGING

60 cm
45 cm
220 cm
51 cm
67 cm
26 cm
51 cm

HARD CASE (INTEGRATED HANDLE)

Total weight	20 kg
Net weight balloon only	3 kg

▶ INDUSTRIAL KIT: DIMENSIONS & PACKAGING

60 cm
45 cm
130 cm - 415 cm
130 cm
58 cm
22 cm
30 cm

METAL STORAGE BOX (INTEGRATED HANDLE)

Total weight (without stand)	5.6 kg
Net weight balloon only	3 kg

Hands-free backpack

Adjustable: 6 clamping straps
Light weight: 800g
Steady: ergonomical metallic structure, 2 body belts
Specific features: battery housing, double reinforced zips for the cable

▶ USEFUL ACCESSORIES

P400TA Stand

Maximum Height: 4.15 m
Minimum Height: 1.30m
Weight: 10 kg
Footprint: 130 cm

Sandbag (12 kg)

45 degree bent arm

Tilt Mount

▶ TECHNICAL DATA

Lamps	6x 10w LED			
Average lamps life*	40,000 hours			
Efficiency	100 lm/W			
Type of Lamp Socket	6 LED panels (powered by 2 Drivers)			
Maximum power	60 W			
Dimmable 4 positions	100% 8h	66% 12h	33% 16h	flash mode 24h
Lifetime on battery	from 8 to 24 hours			
Available voltage	48v DC			
Restrike time	Instant			
Power supply	48v battery 10Ah-lithium			
Envelope diameter	60 cm			
Envelope height	45 cm			
Envelope options:	multiple envelope colour, without reflector, reflector on bottom			

* Under normal conditions of use

▶ LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	480 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	100 m ²
Light under the balloon (2,5 m height)	100 lux
Maximum lumen	6,000 lm
Colour temperature: DAYLIGHT	5,500°K-6,500°K

▶ SAFETY

Fed with very Low-voltage of Security (< 60v DC)	48v
Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP54
Maximum ambient temperature	45°C
Integrated anti-vibration system	
Wind Resistance Security kit: 40 km/h - Industrial kit: 60 km/h	

▶ PACKAGE INCLUDES

SAFETY KIT: Full set lighting balloon, 1 battery, 1 charger, 1 telescopic column, 1 envelope with reflector, 1 patch kit, 1 user manual, 1 glove, all in 1 black hard case

INDUSTRIAL KIT: Full set lighting balloon, envelope with reflector, patch kit, manual, 1 battery with charger and glove, all in a metal box